


# IPC2451-Fi4N&Fi4NB-SCX50

## 4.0MP Human Recognitive HD Network Varifocal IR Bullet



### Features

#### Excellent Image Quality

- 4.0 Megapixel 1/1.8" progressive scan CMOS sensor
- High definition and smooth picture, 2688 x 1520@25fps
- H.265 video codec, saves up to 50% bandwidth and storage
- 3D noise reduction / Auto Iris / HLC

#### Intelligent Functions

- Motion detection / Tampering / Guard line / Defocus / Scene change / Enter guard area / Exit guard area / Object left / Object removal / Gathering / Audio surge

#### Recognitive Functions

- Up to 36 targets simultaneously
- Target capturing
- Bi-directional people counting
- Built-in picture comparison algorithm, best picture selection
- Face Intelligence Exposure

#### Integrated High Efficiency IR

- Industrial IR LED with long operational lifespan
- Up to 50m white light distance

#### A Variety of Installation Modes


- Supports 90°, 180°, 270° image rotation
- Varifocal AF lens

#### Abundant Functions and Features

- Micro SD card slot, support Automatic Network Replenishment (ANR)
- Bi-directional audio / alarm in and out / RS485
- -40°C ~ 70°C operation temperature
- IP67

### Dimensions

Units:mm

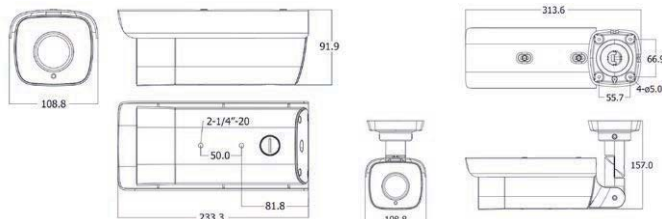

### Specifications

IPC2451-Fi4N&Fi4NB-SCX50	
<b>Camera</b>	
Image Sensor	1/1.8" progressive scan CMOS
Pixels	4.0 Megapixel
Min. Illumination	Color: 0.0005lux @ (F1.2, AGC ON) B/W: 0.0001lux @ (F1.2, AGC ON); 0Lux with IR
Shutter Speed	1 ~ 1/30,000s
Day / Night	Auto (ICR) / Color / B/W
Wide Dynamic Range	Digital WDR
S/N Ratio	>=58dB
White Balance	Auto / Manual
Gain Control	Auto / Manual
Backlight Compensation	Off / BLC / WDR / HLC
<b>Lens</b>	
Auto Iris	DC drive
Focal Length	-Z8032: 8-32mm @ F1.2 motorized varifocal AF lens
Focus Control	Manual / Semi-Automatic / Auto
Angle of View	-Z8032: 15°~38°
<b>Fill Light</b>	
Warm Yellow Light	50m
<b>Video</b>	
Compression	H.265 / H.264 / MJPEG
Image Resolution	Main stream: 2688 x 1520 Secondary stream: D1
Frame Rate	Main stream: 2688 x 1520@25fps Secondary stream: D1@25fps
Bitrate	32kbps ~ 16Mbps
Bitrate Control	VBR / CBR
Multi-stream	Supported
Caption	Date and time / Alarm / Customized
Privacy Masking	Up to 4 zones
Motion Detection	Up to 4 zones
ROI	Supported
Digital Noise Reduction	3D noise reduction
Digital Defog	Supported
Image Flip	Flip / Mirror / Rotation at 90°, 180°, 270°
<b>Audio</b>	
Compression	G.711a / G.711u / ADPCM / G.722 /
Bitrate	32kbps ~ 64kbps
Audio Function	Bi-directional audio / AEC / Mixed audio recording / Dumb / Mute
<b>Network</b>	
Network Protocols	TCP/IP, UDP, HTTP, DHCP, DNS/DDNS, RTP/RTCP, RTSP, PPPoE, FTP, IGMP, VSIP, UPnP, 802.1x, NAT, QoS, SMTP, IPv4, IPv6 (optional)
User Interface	Chrome
Max. User Access	Max. 20 Users (includes 2 internal)
Application Programming	ONVIF (Profile S, Profile G, Profile T), GB/T 28181-2011, API, CGI
Automatic Network Replenishment (ANR)	Supported
<b>Recognitive Functions</b>	
Target Detection	Person, Face Up to 36 targets simultaneously
Captured Picture	Person, Face Built-in picture comparison algorithm, best picture selection
Target Characters	Direction / Speed level
People Counting	Bi-directional
Face Enhancement	Face Intelligence Exposure
<b>Alarm</b>	
Alarm Triggers	Alarm input / Network disconnect / Disk full / Disk error
Intelligent	Motion detection / Tampering / Guard line / Defocus / Scene change / Enter guard area / Exit guard area / Object left / Object removal / Gathering
Alarm Events	Alarm report / Recording / Text overlay / Snapshot / External output / Email notice / Acoustic alarm
<b>Interfaces</b>	
Ethernet	10/100M, RJ45 interface
Audio In / Out	1 x Line in / 1 x Line out
Control	1 x RS485
Alarm In / Out	1 x Input / 1 x Output
Memory Slot	Micro SD card slot, supports up to 256GB
<b>Environmental</b>	
Operating Temperature	-40°C ~ 70°C / -40°F ~ 158°F
Operating Humidity	10% ~ 95%
Protection level	IP67
<b>Electrical</b>	
Power	DC 12V ± 10%
Power Consumption	Max. 15W
<b>Mechanical</b>	
Weight	-FNB: 2.5kg / 5.5lb (Gross Weight) -FN: 2kg / 4.4lb (Gross Weight)
Dimensions	-FNB: 313.6 x 108.8 x 157mm / 12.35" x 4.28" x 6.19" -FN: 233.3 x 108.8 x 91.9mm / 9.19" x 4.28" x 3.62"
Mounting Bracket	-FNB: Bracket included -FN: Bracket not included